

Diesel Applicator Spray

Product properties

Diesel Applicator Spray for cleaning of the air intake of diesel engines. Even highly adhesive and heavy deposits will be removed without residue. In this case, the complete valve and intake system, especially inlet valves, piston rings, top land and the entire combustion chamber will not only be cleaned but also lubricated and protected.

Area of application

Service product for use in diesel powered engines. Recommended for engines with particulate filter, turbo and catalytic converter.

Application

Do not fill in to the diesel tank. Spray while the engine running into the air intake system of the diesel engine. If the engine runs smoothly, spray the product constantly in the air intake pipe, in rough engine running in short bursts.

Consumption

400 ml sufficient for 1-2 applications

Reaction time

approx. 20 sec.

Technical data

Physical state: aerosol

Colour: clear/colourless

Odour: aromatic


Flashpoint: < 0 °C

Ignition temperature: > 200 °C

Density at 68 °F: 0.815-0.825 g/cm³

Water resistant

Available sizes	Item no.	PU
400ml	33149	12

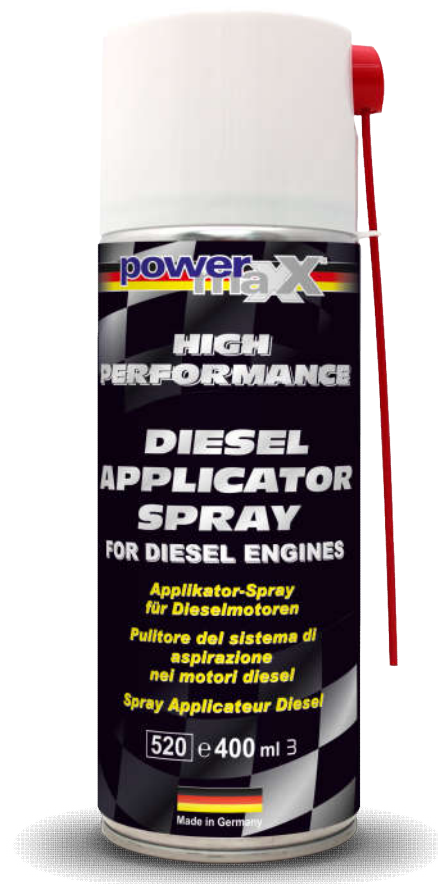

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advise. No liability for printing errors, technical modifications and errors excepted.